
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-MIA-LH-LE Step Entry 1,060 o/a SKU: LQ-MIA-LH-ST 1,010 o/a 995 65 969 969 16 0 Upstand Upstand Countersunk to 2 sides to 2 sides Screw Holes 484.5 977 To centre line of glazing 977 To centre line of glazing See Waste Channel 484.5 **Recess Specifications** for size 1,010 o/a 1,060 o/a Fall Fall 484.5 484.5 Floor Recess 1030x1030x30 Glazing Channel Glazing Channel 977 10 977 To centre line of glazing To centre line of glazing **Drain Section Drain Section** Edge Section **Edge Section** 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen Framing - Wall Framing Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 10|10 1010 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes 85 _Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess 16 Depth 40 □ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth Note: Verify exact shower base dimensions on site information under floor information under floor

Screen Options:



For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/miami-1000x1000-2/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



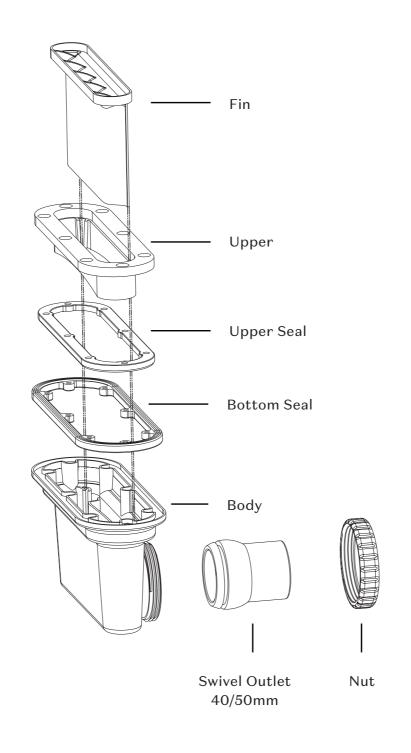

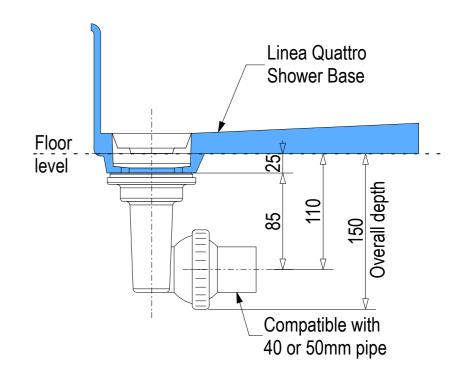

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



