




Step Entry SKU: LQ-MIL-LH-ST Level Entry SKU: LQ-MIL-LH-LE 1,260 o/a 1,210 o/a 1,195 1,169 1,169 16 See Waste Channel **Recess Specifications** for size Countersunk Upstand Upstand 434.5 434.5 to 2 sides to 2 sides Screw Holes 910 o/a _ Fall Fall Floor Recess 1230x930x32 434.5 434.5 **Glazing Channel** Glazing Channel ু স্পু [∆]10ֻ_⊳ 1,177 1,177 To centre line of glazing To centre line of glazing **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope 8mm Toughened Safety
Glass Screen Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 25 Countersunk Glazing Channel Screw Holes _Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess 16 40 _□ 31 _□ See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Note: Drain position central unless dimensioned otherwise

Screen Options:







For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/milan-1200x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



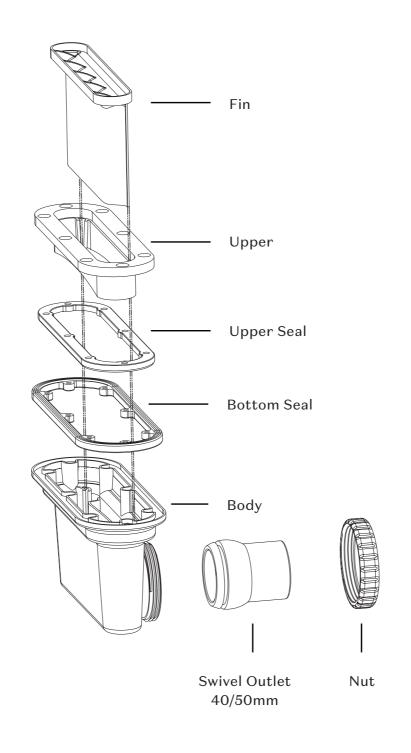

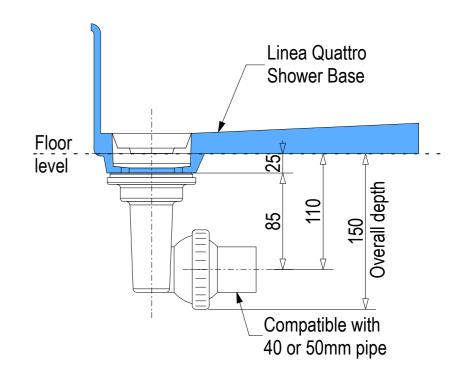

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



