




Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-VAN-LH-LE SKU: LQ-VAN-LH-ST 1,460 o/a 1,410 o/a 1,395 1,369 1,369 1,6 See Waste Channel Upstand Upstand Countersunk Recess Specifications to 2 sides to 2 sides Screw Holes 977 To centre line of glazing 484.5 977 To centre line of glazing 484.5 for size 1,010 o/a 1,060 o/a Fall _ Fall Floor Recess 1430x1030x34 484.5 484. **Glazing Channel** Glazing Channel 1,377
To centre line of glazing 1,377
To centre line of glazing **Drain Section** Edge Section **Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen Framing - Wall Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel 10 10 Waterproofing Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes 85 Floor Level Shower Floor Shower Floor Recess Floor Level Recess Level Depth _16_ 40 □ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth Note: Verify exact shower base dimensions on site information under floor information under floor

Screen Options:







For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/vancouver-1400x1000/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



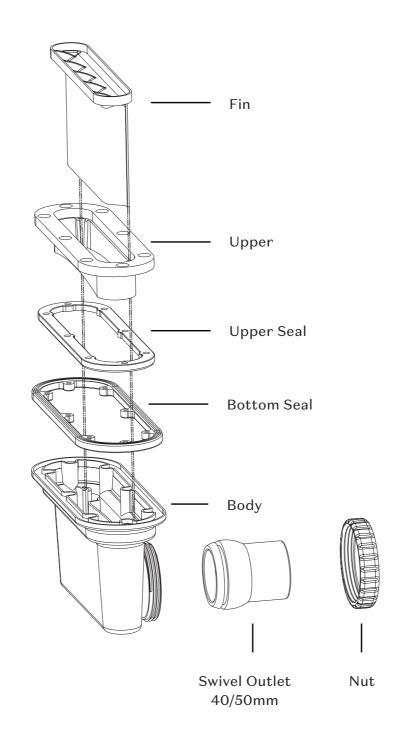

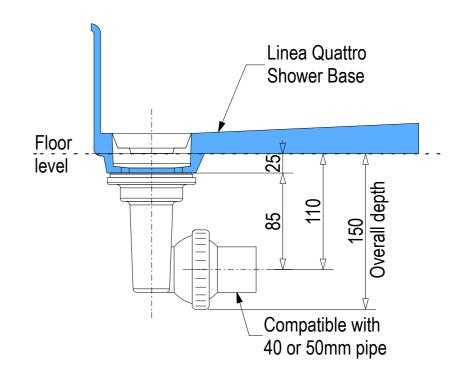

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



